

# Встраиваемые прямоугольные мармиты MOD400

## Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижегород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: [wse@nt-rt.ru](mailto:wse@nt-rt.ru) || сайт: <https://wells.nt-rt.ru/>



Over 90 Years Of Quality Foodservice  
Products And Service

## MOD400 Series 12" X 20" Four-Well Heavy Duty, Top-Mount, Rectangular Drop-In Food-Warmers



MOD400



MOD400TDMF with dual control panels

### DESCRIPTION

Wells heavy-duty, top-mount, drop-in, Modular food warmers are designed to hold heated foods at safe and fresh serving temperatures. Wells MOD400 Series accommodates four 12" X 20" standard food pans or equivalent fractional inset pans and are designed for wet or dry operation

### SPECIFICATIONS

**Construction** - One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans are standard features on all models. Wellsloks are standard for quick and easy installation.

**Insulation** - Sides, front, back and bottom are fully insulated for energy savings, efficiency, quicker pre-heat and faster recovery.

**Controls & Heating**- Individual controls for each well provide maximum versatility. Models with thermostatic or infinite controls are available. High-limits prevent overheating. Temperature-ready indicator lights are standard on all control types. Powerful tubular heating elements are located under the warming pans for quick and efficient heating and for even heat distribution.

#### Additional Features Available

- Auto water-fill to maintain proper water level.
- Select models are field convertible from 3Ø to 1Ø
- Drains
- Drains with manifolds
- Infinite or thermostatic controls

### STANDARD FEATURES

- ❑ Accommodates four 12" X 20" standard inset pans or equivalent fractional pans
- ❑ One-piece stainless steel top flange and heavy-gauge, deep-drawn stainless steel warming pans
- ❑ Suitable for wet or dry operation (wet recommended for best results)
- ❑ Energy-saving fully-insulated construction
- ❑ Fully Insulated models are perfect for non-metal counters
- ❑ Thermostatic or infinite controls
- ❑ Separate controls for each individual wells
- ❑ High limits prevent overheating
- ❑ Thermostatic controls are recessed in a one-piece, drawn, front-mounted panel
- ❑ Wellslok standard for ease of installation
- ❑ Powerful tubular heating elements
- ❑ 1/2" drains and manifolds available
- ❑ 1-Year Limited Parts & 1-Year Limited Labor Warranty

### OPTIONS & ACCESSORIES

- ❑ Adaptor tops for round insets
- ❑ Inset with lid
- ❑ 8oz. soup ladle
- ❑ Drain value extension kit
- ❑ Drain screens
- ❑ Wellslok extension kits for wood counter installations
- ❑ Optional 72" wiring
- ❑ Autofill models with single or double control panels

### CERTIFICATIONS







Over 90 Years Of Quality Foodservice  
Products And Service

# MOD400 Series 12" X 20" Four-Well Heavy Duty, Top-Mount, Rectangular Drop-In Food-Warmers

## Single Control Panel

## Two Control Panels

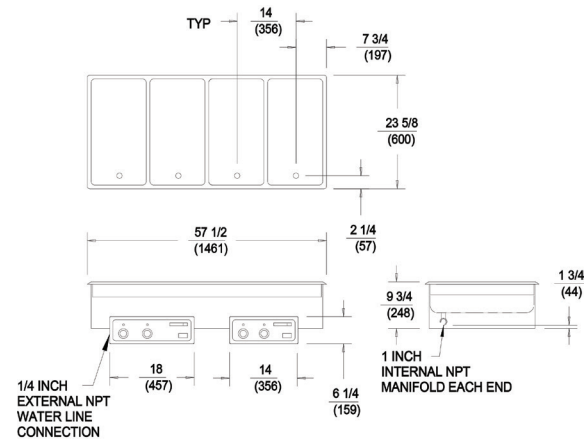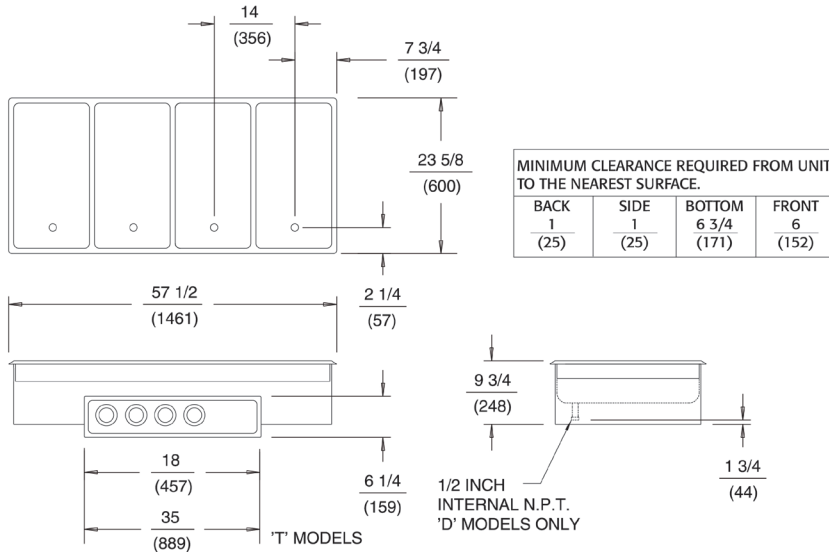

## SPECIFICATIONS

| Model Number                          | Description                                                                   | Volts       | Watts Per Well           | Phase | Standard Power Cord Supply | OVERALL Width Left to Right Inches (MM) | OVERALL Length Front to Back Inches (MM) | OVERALL Height Inches (MM) | CONTROL PANEL Width Front to Back Inches (MM) | CONTROL PANEL Height Left to Right Inches (MM) | Shipping Weights Pounds (KG) | Crate Size Cubic Feet (Cubic Meters) | Approvals |
|---------------------------------------|-------------------------------------------------------------------------------|-------------|--------------------------|-------|----------------------------|-----------------------------------------|------------------------------------------|----------------------------|-----------------------------------------------|------------------------------------------------|------------------------------|--------------------------------------|-----------|
| MOD400*                               | Infinite Controls no Drains                                                   | 208<br>240V | 900<br>1200              | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 18 (457)                                      | 6-1/4 (159)                                    | 95 (43.18)                   | 13.56 (0.298)                        | N U       |
| MOD400CSA*                            | Infinite Controls no Drains                                                   | 208<br>240V | 700<br>1200              | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 18 (457)                                      | 6-1/4 (159)                                    | 95 (43.18)                   | 13.56 (0.298)                        | N C       |
| MOD400D*                              | Infinite Controls with Drains                                                 | 208<br>240V | 900<br>1200              | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 18 (457)                                      | 6-1/4 (159)                                    | 98 (44.55)                   | 13.56 (0.298)                        | N U       |
| MOD400DM*                             | Infante Controls with Drains & Manifold                                       | 208<br>240V | 900<br>1200              | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 18 (457)                                      | 6-1/4 (159)                                    | 98 (44.55)                   | 13.56 (0.298)                        | N U       |
| MOD400T*                              | Thermostatic Controls no Drains                                               | 208<br>240V | 1240<br>1650             | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 35 (889)                                      | 6-1/4 (159)                                    | 98 (44.55)                   | 13.56 (0.298)                        | N U       |
| MOD400TD*                             | Thermostatic Controls with Drains                                             | 208<br>240V | 1240<br>1650             | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 35 (889)                                      | 6-1/4 (159)                                    | 105 (47.73)                  | 13.56 (0.298)                        | N U       |
| MOD400TDM*                            | Thermostatic Controls with Drains & Manifold                                  | 208<br>240V | 1240<br>1650             | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 35 (889)                                      | 6-1/4 (159)                                    | 105 (47.73)                  | 13.56 (0.298)                        | N U       |
| MOD400TDMAF*<br>Dual Control Panel    | Thermostatic Controls with Drains, Manifold & Auto-Fill                       | 208<br>240V | 1240<br>1650             | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 18 & 14 (457) & (356)                         | 6-1/4 (159)                                    | 112 (50.91)                  | 13.56 (0.298)                        | N U       |
| MOD400TDMAFS*<br>Single Control Panel | Thermostatic Controls with Drains, Manifold, Auto-Fill & Single Control Panel | 208<br>240V | 1240 (6.0)<br>1650 (6.9) | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 35-1/6 (891)                                  | 6-1/4 (159)                                    | 112 (50.91)                  | 13.56 (0.298)                        | N U       |
| MOD400TDAF*                           | Thermostatic Controls with Drains & Auto-Fill                                 | 208<br>240V | 1240<br>1650             | 3Ø*   | NONE                       | 57-1/2 (1461)                           | 23-5/8 (600)                             | 9-3/4 (248)                | 35-1/6 (891)                                  | 6-1/4 (159)                                    | 112 (50.91)                  | 13.56 (0.298)                        | N U       |

\* All MOD400's ship 3Ø and are field convertible to 1Ø

**AutoFill models require a water connection. Please refer to the operator's manual and installation instructions for details.**

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

## По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04  
Ангарск (3955)60-70-56  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Благовещенск (4162)22-76-07  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Владикавказ (8672)28-90-48  
Владимир (4922)49-43-18  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Коломна (4966)23-41-49  
Кострома (4942)77-07-48  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Курган (3522)50-90-47  
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижегород (831)429-08-12  
Новокузнецк (3843)20-46-81  
Ноябрьск (3496)41-32-12  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Петрозаводск (8142)55-98-37  
Псков (8112)59-10-37  
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Саранск (8342)22-96-24  
Симферополь (3652)67-13-56  
Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Сыктывкар (8212)25-95-17  
Тамбов (4752)50-40-97  
Тверь (4822)63-31-35

Тольятти (8482)63-91-07  
Томск (3822)98-41-53  
Тула (4872)33-79-87  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Улан-Удэ (3012)59-97-51  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Чебоксары (8352)28-53-07  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Чита (3022)38-34-83  
Якутск (4112)23-90-97  
Ярославль (4852)69-52-93

**Россия** +7(495)268-04-70

**Казахстан** +(727)345-47-04

**Беларусь** +(375)257-127-884

**Узбекистан** +998(71)205-18-59

**Киргизия** +996(312)96-26-47

эл.почта: [wse@nt-rt.ru](mailto:wse@nt-rt.ru) || сайт: <https://wells.nt-rt.ru/>